Mono 260W

www. osdasol.com

Features

- High conversion efficiency
- Low power tolerance of 0~+3%
- Low degradation under light exposure
- Can withstand high wind-pressure，snow load and extreme temperature
- Passing IEC 61215 2400Pa mechanical load test

Quality and Safety

- 12-year warranty on product materials and processing technology
- Power output warranty:12 years:90%,25 years:80%
- ISO 9001:2008(Quality Management System) certified factory
- IEC61215,IEC61730 ,MCS CEC certified products
- TUV,CE conformity

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power plants
- Off-grid system
- Other on-grid applications

Specifications

Model Type	ODA260-48-M
Peak Power(Pmax)	260.00
Maximum Power Voltage(Vmp)	51.25
Maximum Power Current(Imp)	5.08
Open Circuit Voltage(Voc)	60.09
Short Circuit Current(Isc)	5.43
Cells Efficiency(%)	18.01
Module Efficiency(%)	15.38
Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	15
Power Tolerance	0～+3%
Pmax Temperature Coefficients(W/℃)	-0.450%
Voc Temperature Coefficients(V/℃)	-0.350%
Isc Temperature Coefficients(A/℃)	+0.040%
NOCT Nominal Operating Cell Temperature(℃)	47±2
Operating and Storage Temperature(℃)	-40～+85
Standard Test Condition(STC)	1.000W/㎡;AM 1.5;25+/-2℃

Mechanical characterisrtics & Packaging

Cell Type	Mono-crystalline 125×125mm
No. of Cells	96(8×12)
Dimensions	1600×1056×40mm
Weight	19.50kgs
Front Glass	3.2mm high transmission,low iron,tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65 Rated
Output cables	4.0mm² Length 90cm, MC4 connector
1x20'	14pallets/332pcs
1x40'HQ	28pallets/840pcs
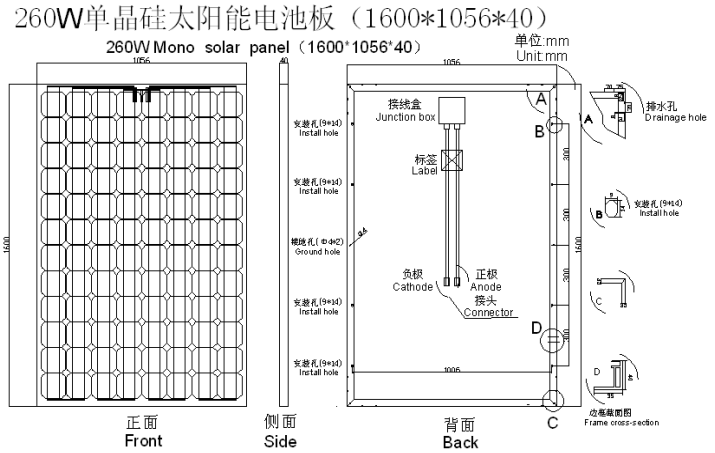
Dimensions